
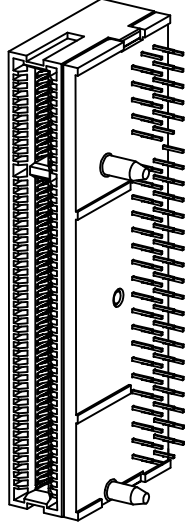
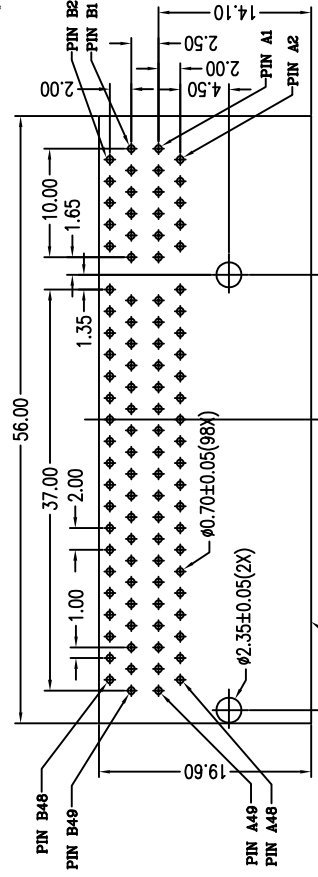
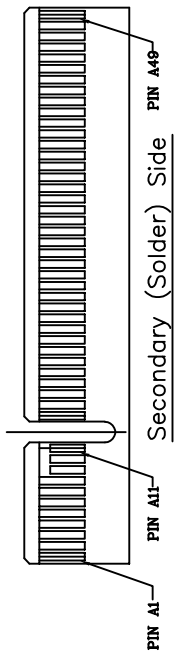
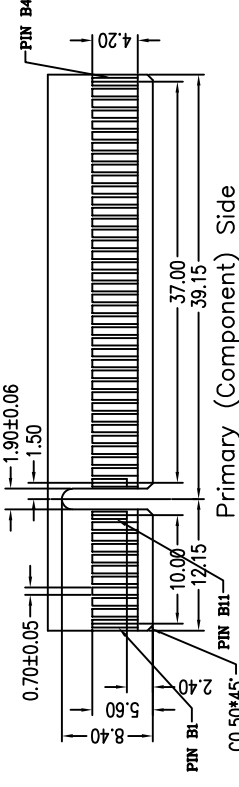
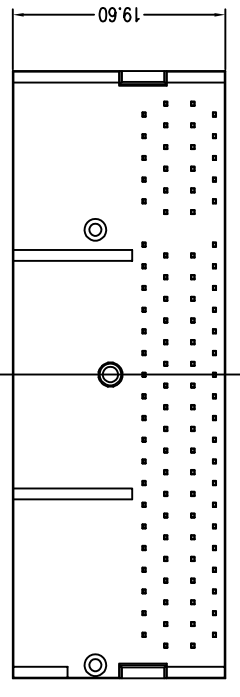


Part Number	Dim A
EAST-098AN41B2UW	2.50mm
EAST-098AN41B3UW	3.10mm
EAST-098AN41B4UW	3.56mm

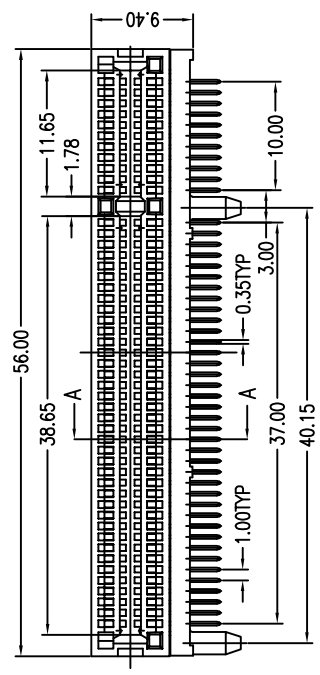

3D VIEW

NOTES:
***Material**

Housing: Nylon46, UL 94V-0 Rated. Color: Black
 Contact: Brass
 Plating: Au Plating On Contact Area;
 Sn(100u" Min.) Plating On Solder Tail;
 Ni(40u" Min.) Underplating Overall

***Mechanical**

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;

***Electrical Specification**

Contact Resistance : 30mΩ Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000MΩ Min, At 500V AC.

***Environmental**

Operating Temperature : -55°c to +105°c

***How to Order:**

EAST-098AN41B2UW

Number of Contacts
 Au: A:>0.8u" D:15u" F:30u"

- N4:Nylon46
- 1:Black
- B:Brass
- U:Lead Free
- 2:Solder Height 2.50
- 3:Solder Height 3.10
- 4:Solder Height 3.56

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER COPY		深圳市东方御业科技有限公司	
X.X	± 0.38	DRAWN:	CHENLEI	2017/09/10	TEL:0755-27155560
X.XX	± 0.25	CHECKED:	CHENLEI	2017/09/10	WWW.DFYCONN.COM
X.XXX	± 0.10	APPROVED:	QINJIALING	2017/09/10	
Angle	± 1°	TOTAL:			
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue Electronic Co.,LTD. SHALL NOT BE REPRODUCED.					
PCI EXPRESS R/A DIP TYPE 98P CRT (REFS)			PART NO: EAST-098AN41B2UW		
SCALE: N/A			SHEET: 1:1		