





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike
		修改料号描述	2023/10/26	

NOTES

- MATERIAL:
 - Housing(UPPER):PBT, UL 94V-0, Color:Green 322C.
 - Housing(LOWER):PBT, UL 94V-0, Color:Blue 661C.
 - Connecting Pedestal:PA9T, UL 94V-0,Color:Blue 661C.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Shield:SPCC.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Steel.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Matte Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Shield:Tin Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
- The heat-resistant temperature of this product is 265°C+0°C/-5°C
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 4.0 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C
- VGA
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 6.0 Kgf Max.
 - Total Unmating Force: 1.2 Kgf Min.
 - Operating Temperature: -55°C to +85°C

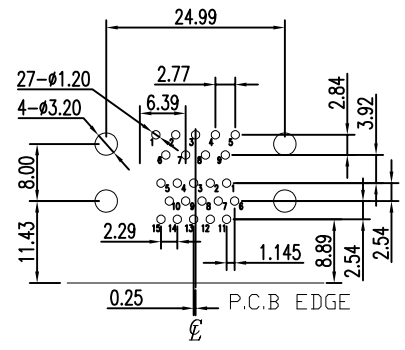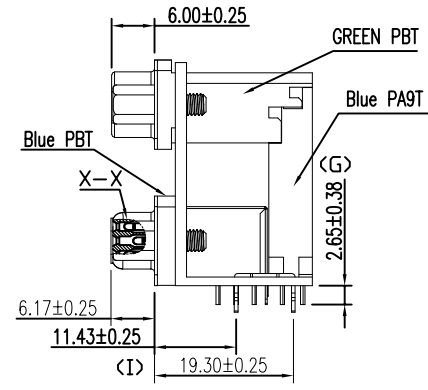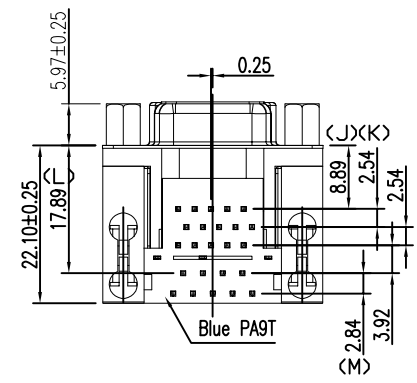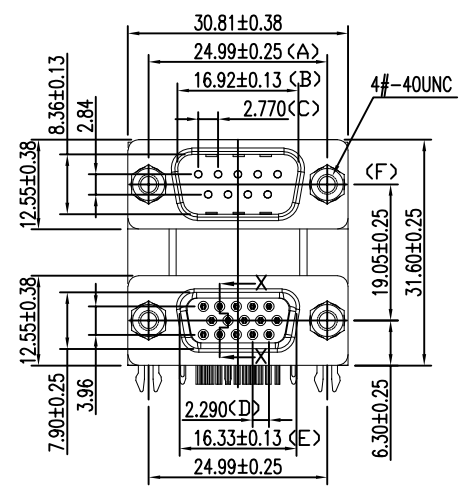

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)

EAST-B1M2AP2A1XX

中心高
A:15.88mm
B:19.05mm


塑胶颜色:
1:黑色
C:上层绿色, 下层蓝色
F:上层绿色, 下层黑色
J:上层黑色, 下层蓝色

螺丝:
1:无螺丝
A:锁螺丝4.8*11.8
B:附螺丝4.8*11.8
E:锁螺丝5.8*11.8
F:附螺丝5.8*11.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinkx	2018/01/20	TITAL: D-SUB 0.35"(8.89) FOOTPRINT 9 MALE /15 FEMALE HIGH DENSITY CONNECTOR DUAL PORT (RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO: EAST-B1M2AP2A1XX
	APPROVED: Chenl	2018/01/20	UNIT: mm SCALE: N/A SHEEL: 1/1 REV: A

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

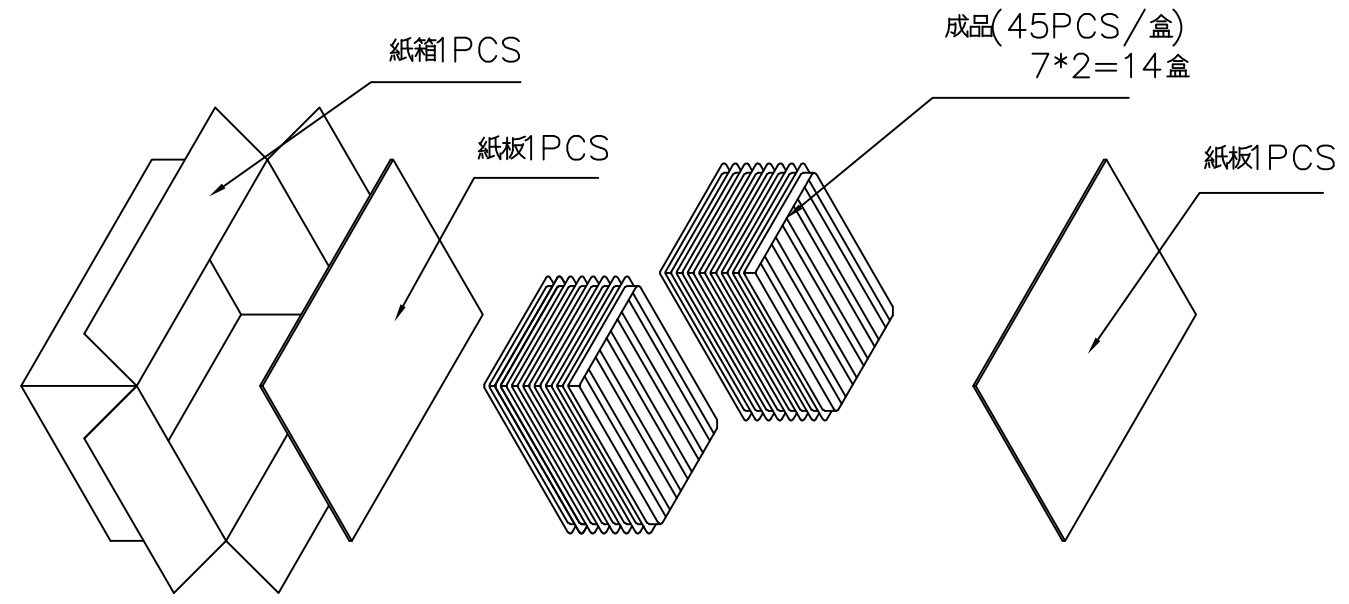

加厚紙箱: 45*31*22.5CM

EAST-B1M2AP2A1XX	X.XX	X.XX	45*14=630
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinkx	2018/01/20	TITLE: D-SUB双层系列包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO:	
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A
			SHEET: 1/1	REV. A

www.dfyconn.com