
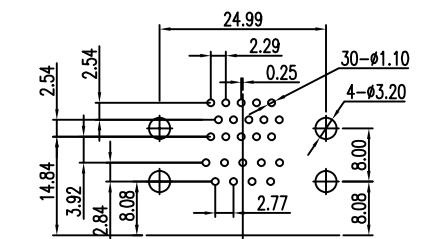
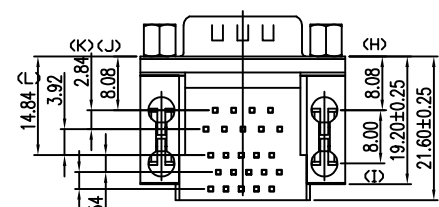


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

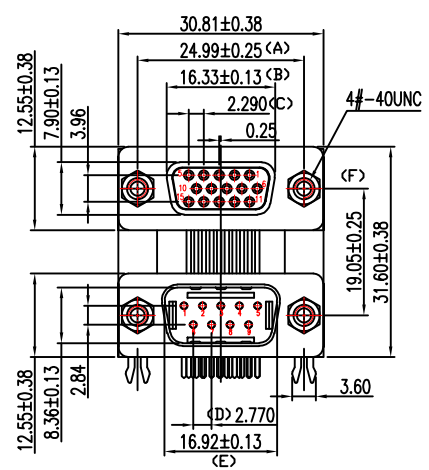

RECOMMENDED P.C.B LAYOUT


INSPECTION DIMENSION:(A)~(M)

SPECIFICATIONS

- D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C
2. VGA
- 2.1 Voltage: 250 VAC(RMS) Max.
- 2.2 Current Rating: 3 Ampere per Contact
- 2.3 Contact Resistance: 25 Milliohms Max.
- 2.4 Insulation Resistance: 5000 Megohms Min.
- 2.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 2.6 Total Mating Force: 6.0 Kgf Max.
- 2.7 Total Unmating Force: 1.2 Kgf Min.
- 2.8 Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
  - Housing:PBT, UL 94V-0, Color:Black.
  - Terminal:Copper Alloy.
  - Shell:SPCC.
  - Boardlock:Copper Alloy.
  - Bracket:Zinc Alloy.
  - Screw:Copper Alloy.
- FINISH:
  - Terminal:Gold Plated over Nickel at Contact Area.
  - Tin Plated over Nickel at Solder Ared.
  - Shell:Nickel Plated.
  - Boardlock:Tin Plated.
  - Bracket:Nickel Plated.
  - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

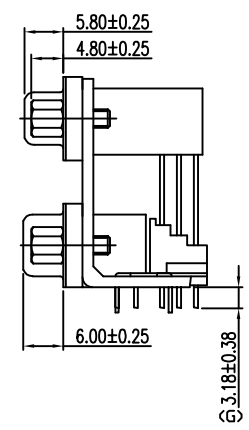

EAST-6S1PBP2A1XXR


- 中心高
- A: 15.88mm
- B: 19.05mm
- 螺丝:
- I: 无螺丝
- A: 锁螺丝4.8\*11.8
- B: 附螺丝4.8\*11.8
- E: 锁螺丝5.8\*11.8
- F: 附螺丝5.8\*11.8
- 环保要求: R:ROHS
- 塑胶颜色:
- 1: 黑色
- 2: 蓝色
- A: 上层黑色, 下层蓝色
- D: 上层蓝色, 下层黑色

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Li yu	2013/02/05	TITL: D-SUB 0.350*(8.89mm) FOOTPRINT 15 FEMALE HIGH DENSITY CONNECTOR /9 MALE CONNECTOR, DUAL PORT
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.	CHECKED: Mike	2013/02/05	PART NO: EAST-6S1PBP2A1XXR
	APPROVED: Mike	2013/02/05	UNIT: mm SCALE: N/A SHEEL: 1/1 REV: A

www.dfyconn.com

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

# 包裝圖

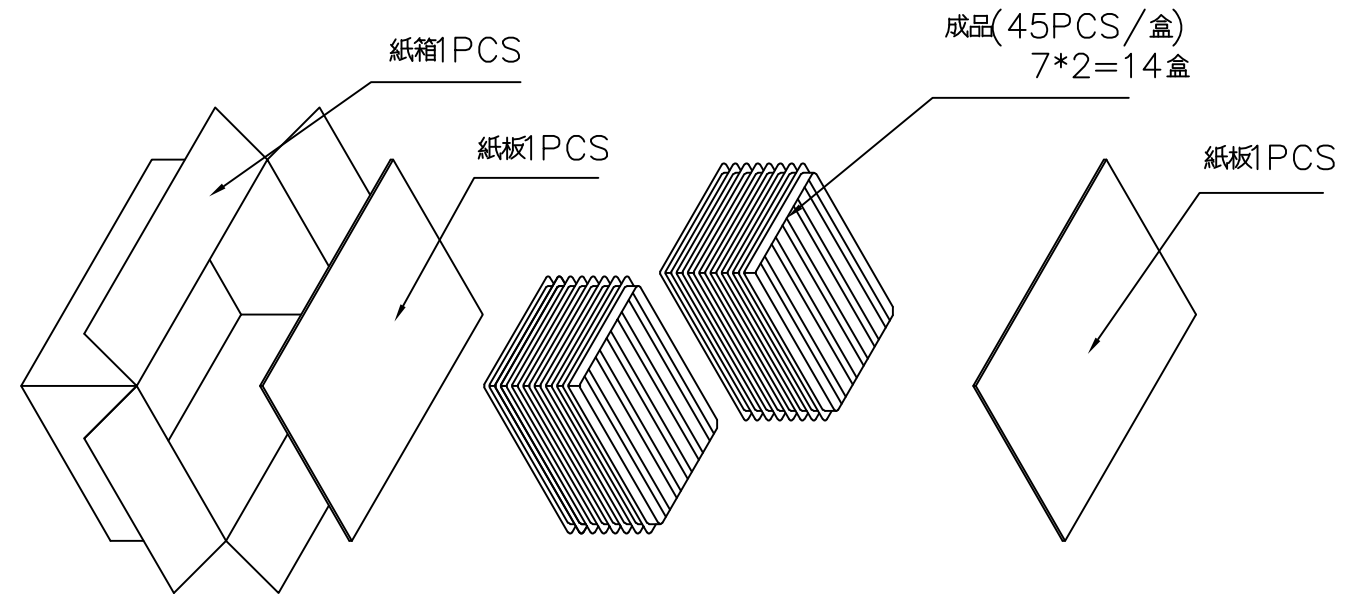

加厚紙箱: 45\*31\*22.5CM

<b>EAST-6S1PBP2A1XXR</b>	X.XX	X.XX	45*14=630
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
	DRAWN: Qinkx	2018/01/20	TITIAL: D-SUB 双层系列包装图		
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO: EAST-6S1PBP2A1XXR		
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A	SHEEL: 1/1
				REV: A	

www.dfyconn.com