




REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2017/04/10	Mike

NOTES

- MATERIAL:
Housing(UPPER):PBT, UL 94V-0, Color:Black.
Housing(LOWER):PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C
- 2.1 Voltage: 250 VAC(RMS) Max.
- 2.2 Current Rating: 3 Ampere per Contact
- 2.3 Contact Resistance: 25 Milliohms Max.
- 2.4 Insulation Resistance: 5000 Megohms Min.
- 2.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 2.6 Total Mating Force: 6.0 Kgf Max.
- 2.7 Total Unmating Force: 1.2 Kgf Min.
- 2.8 Operating Temperature: -55°C to +85°C

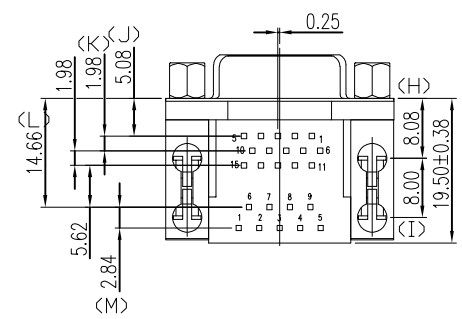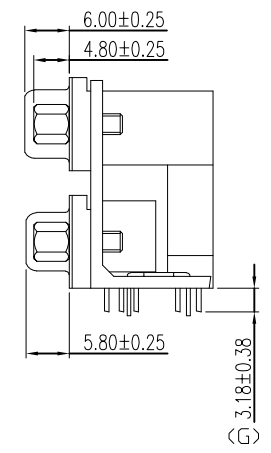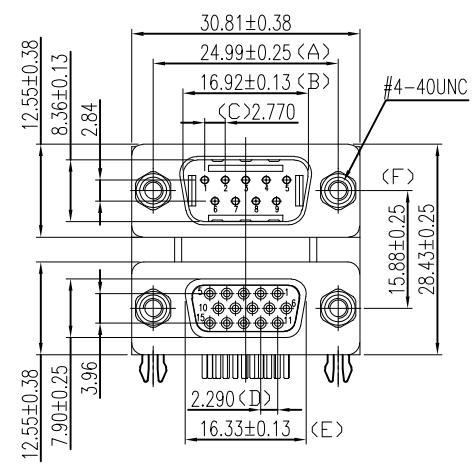


EAST-A1N2AP2A1XX

中心高
A: 15.88mm
B: 19.05mm

塑胶颜色:
I: 黑色
C: 上层绿色, 下层蓝色
F: 上层绿色, 下层黑色
J: 上层黑色, 下层蓝色

螺丝:
I: 无螺丝
A: 锁螺丝4.8*11.8
B: 附螺丝4.8*11.8
E: 锁螺丝5.8*11.8
F: 附螺丝5.8*11.8

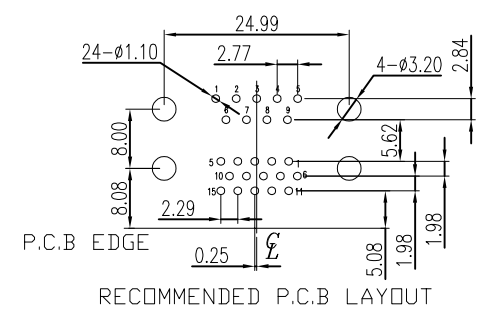


INSPECTION DIMENSION:(A)~(M)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY	深圳市东方御业科技有限公司 TEL:0755-27155560 WWW.DFYCONN.COM		
	DRAWN: Qinx	2017/04/10	TITIAL: D-SUB 0.20*(5.08) FOOTPRINT 9 MALE /15 FEMALE HIGH DENSITY CONNECTOR DUAL PORT (RoHS)	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyuye CO.,LTD. SHALL NOT BE REPRODUCED.	CHECKED: Chenlei	2017/04/10	PART NO: EAST-A1N2AP2A1XX	
	APPROVED: Chenlei	2017/04/10	UNIT: mm	SCALE: N/A SHEEL: 1/1 REV: A

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

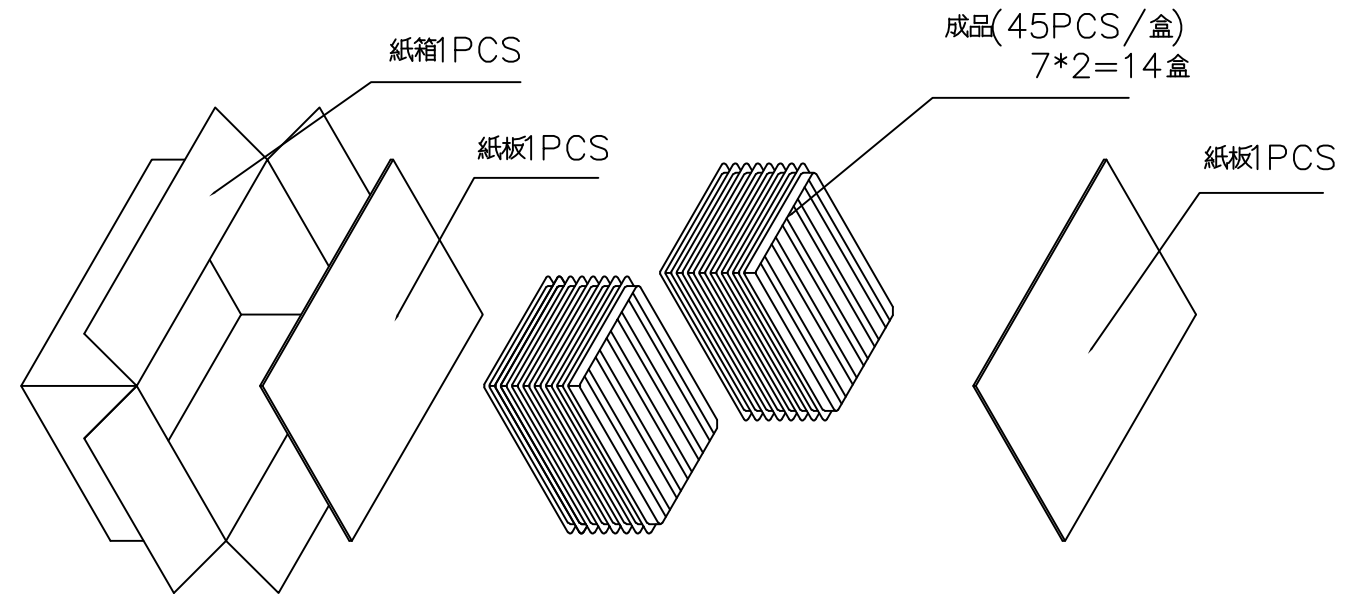

加厚紙箱: 45*31*22.5CM

EAST-A1N2AP2A1XX	X.XX	X.XX	45*14=630
料 號	N.W:(KG)	G.W:(KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560			
	DRAWN: Qinkx	2018/01/20	TITIAL: D-SUB 双层系列包装图			
	CHECKED: Chenl	2018/01/20	PART NO: (RoHS)			
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A	SHEEL: 1/1	REV: A

www.dfyconn.com