




REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2017/09/10	Mike

NOTES

- MATERIAL:**
 Housing:PBT, UL 94V-0, Color:Black.
 Terminal:Copper Alloy.
 Shell:SPCC.
 Boardlock:Copper Alloy.
 Bracket:Zinc Alloy.
 Screw:Copper Alloy.
- FINISH:**
 Terminal:Gold Plated over Nickel at Contact Area.
 Tin Plated over Nickel at Solder Area.
 Shell:Nickel Plated.
 Boardlock:Tin Plated.
 Bracket:Nickel Plated.
 Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

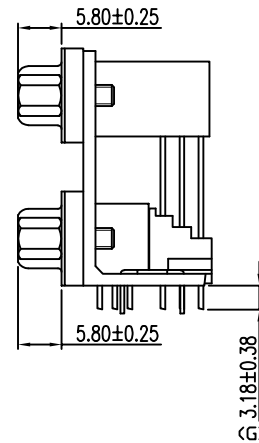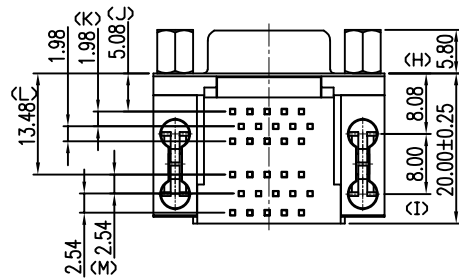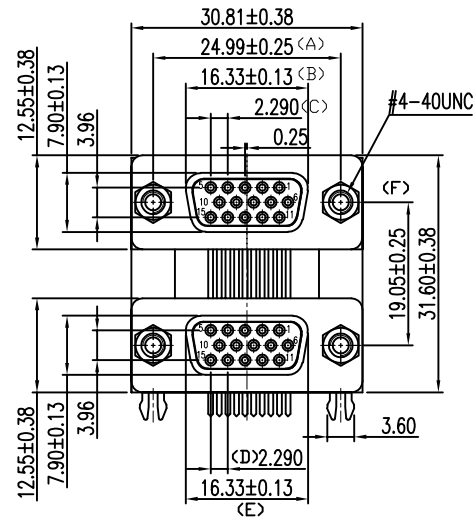

EAST-6SCSBP2A1XX

TOP CONNECTOR TYPE

- 6P: 15-POS. HI-DEN MALE (H15P)
- 6S: 15-POS. HI-DEN FEMALE (H15S)
- 69: SHORT #9 OF 15-POS. HI-DEN FEMALE

BOTTOM CONNECTOR TYPE

- CS: 15-POS. HI-DEN FEMALE (H15S,5.08mm)
- BS: 15-POS. HI-DEN FEMALE (H15S,3.08mm)
- 69: 15-POS. HI-DEN FEMALE (H15S,8.89mm)

SPACING BETWEEN PORTS

TYPE C-C (PROFILE)


- A: 15.88 mm(0.625")
- B: 19.05 mm(0.75")

COLOR STYLE

- 1: ALL BLACK
- 2: ALL BLUE
- A: UPPER-BLACK, LOWER-BLUE
- D: UPPER-BLUE, LOWER-BLACK

FLANGE MOUNTING OPTION

- 1: #4-40 THREADED HOLE
- 4: #4-40 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED (4.8)
- A: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (4.8x11.8)
- E: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (5.8x13.0)
- G: M3 THREADED HOLE WITH M3 SCREWLOCK INSTALLED (5.8x13.0)

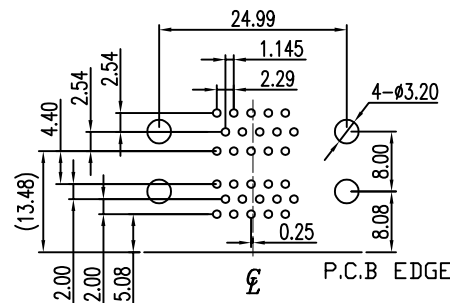


RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinx	2017/09/10	TITL: D-SUB 0.20"(5.08mm) FOOTPRINT 15 FEMALE HIGH DENSITY CONNECTOR /15 FEMALE HIGH DENSITY CONNECTOR, DUAL PORT (RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2017/09/10	PART NO: EAST-6SCSBP2A1XX
	APPROVED: Chenl	2017/09/10	UNIT: mm SCALE: N/A SHEET: 1/1 REV: A

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

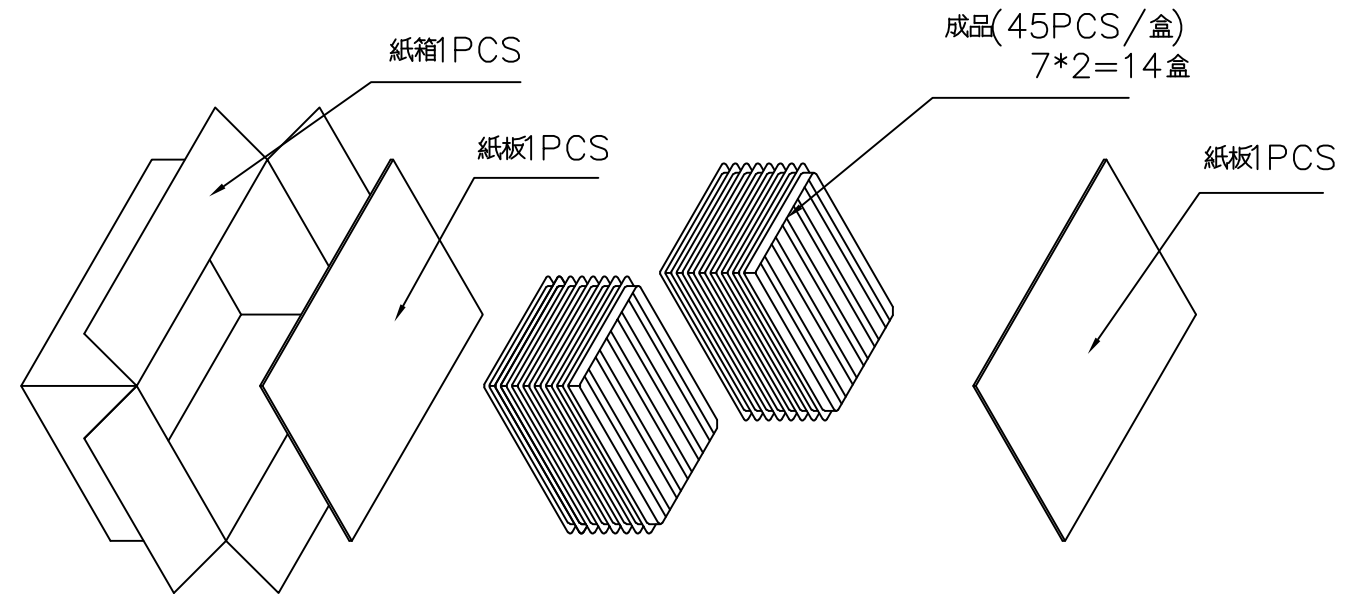

加厚紙箱: 45*31*22.5CM

	X.XX	X.XX	45*14=630
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
	DRAWN: Qinx CHECKED: Chenl APPROVED: Chenl	2018/01/20 2018/01/20 2018/01/20	TITL: D-SUB 双层 封装图 (RoHS)	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	UNIT: mm	SCALE: N/A	SHEEL: 1/1	REV: A

www.dfyconn.com