



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTES

- MATERIAL:**  
 Housing(UPPER):PBT, UL 94V-0, Color:Ivory.  
 Housing(LOWER):PBT, UL 94V-0, Color:Ivory.  
 Terminal:Copper Alloy.  
 Shell:SPCC.  
 Shield:Stainless Steel.  
 Boardlock:Copper Alloy.  
 Bracket:Zinc Alloy.
- FINISH:**  
 Terminal:Gold Plated over Nickel at Contact Area.  
 Tin Plated over Nickel at Solder Area.  
 Shell:Nickel Plated.  
 Boardlock:Tin Plated.  
 Bracket:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.



SPECIFICATIONS

- DVI
  - Voltage: 40 VAC(RMS) Max.
  - Current Rating: 1.5 Ampere per Contact
  - Contact Resistance(UPPER): 30 Milliohms Max.  
Contact Resistance(LOWER): 20 Milliohms Max.
  - Insulation Resistance: 1000 Megohms Min.
  - Dielectric Withstanding Voltage: 500V DC(RMS)
  - Total Mating Force: 4.5 Kgf Max.
  - Total Unmating Force: 1.0 Kgf Min.
  - Operating Temperature: -55°C to +85°C

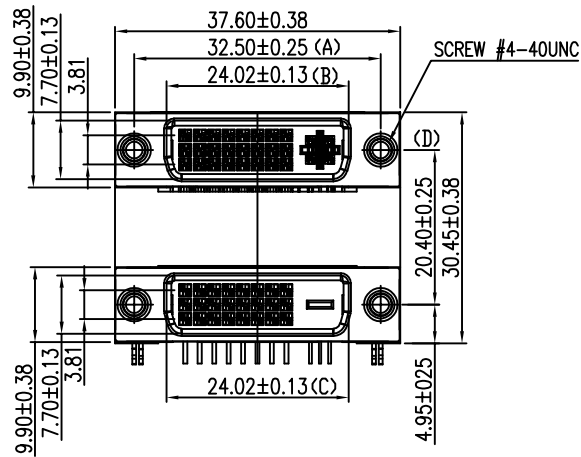


EAST-DVIV4V2CAX2R

- 上层: V4: DVI-I 24+5P  
 下层: V2: DVI-I 24+1P  
 中心高: C: 20.40mm  
 螺丝: 1: 无螺丝  
 A: 锁螺丝 4.8\*11.8  
 B: 附螺丝 4.8\*11.8  
 E: 锁螺丝 5.8\*11.8  
 F: 附螺丝 5.8\*11.8
- 环保要求: R: ROHS  
 塑胶材质:  
 1: PBT  
 2: LCP  
 4: 上层PBT, 下层LCP  
 塑胶颜色:  
 1: 黑色  
 4: 白色  
 C: 上层黑色, 下层白色  
 F: 上层白色, 下层黑色

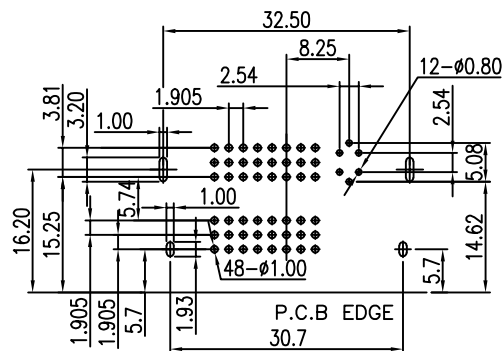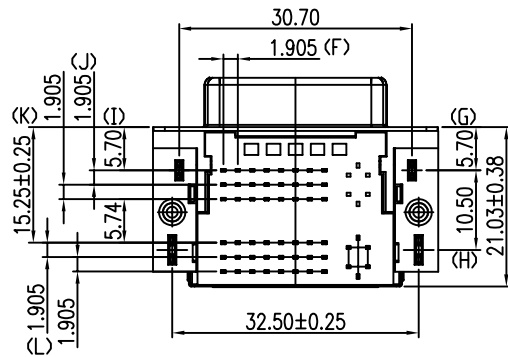

RECOMMENDED P.C.B. LAYOUT


INSPECTION DIMENSION:(A)~(L)



TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ± 1°	COSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: CHENLEI	2017/09/10	TITL: DVI-I / DVI-D FEMALE RIGHT ANGLE (RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.	CHECKED: CHENLEI	2017/09/10	PART NO: EAST-DVIV4V2CAX2R
	APPROVED: QINKAIXING	2017/09/10	UNIT: mm SCALE: N/A SHEET: 1:1 REV.

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

# 包装图

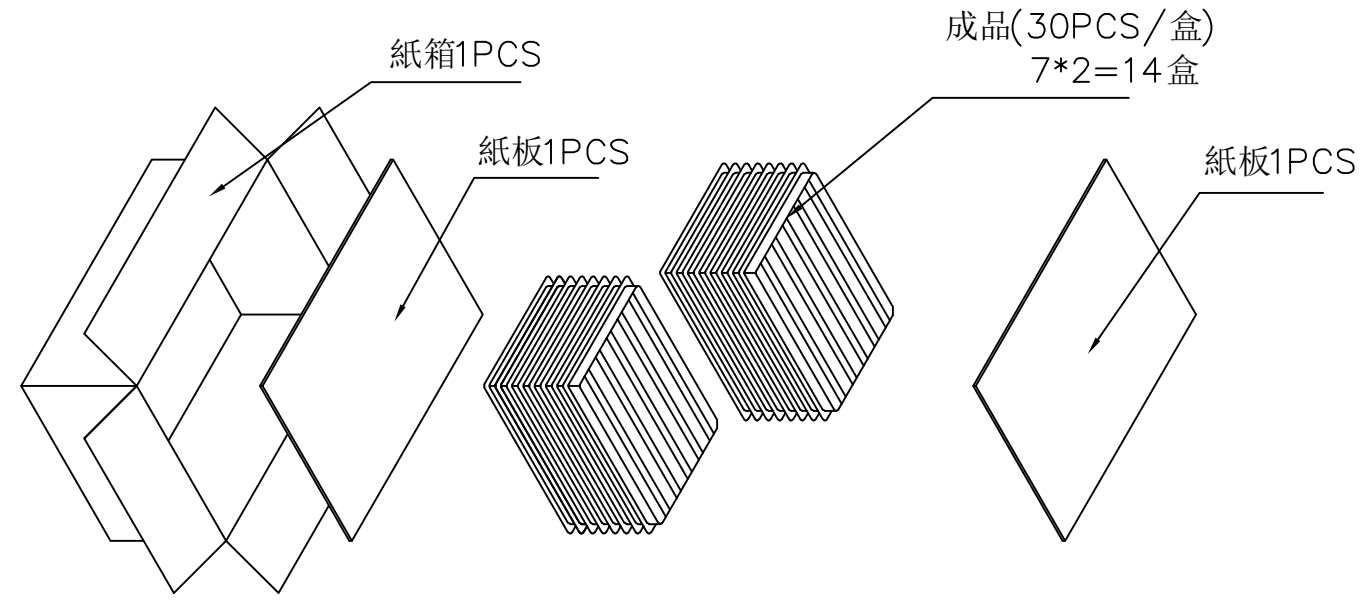

加厚纸箱: 45\*31\*22.5CM

<b>EAST-DVIV4V2CAX2R</b>	X.XX	X.XX	45*14=420
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
	DRAWN: Qinx CHECKED: Chenl APPROVED: Chenl	2018/01/20 2018/01/20 2018/01/20	TITL: D-SUB 双层系列包装图 (RoHS)	PART NO: <b>EAST-DVIV4V2CAX2R</b>	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	UNIT: mm 	SCALE: N/A	SHEEL: 1/1	REV: A	

www.dfyconn.com