REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

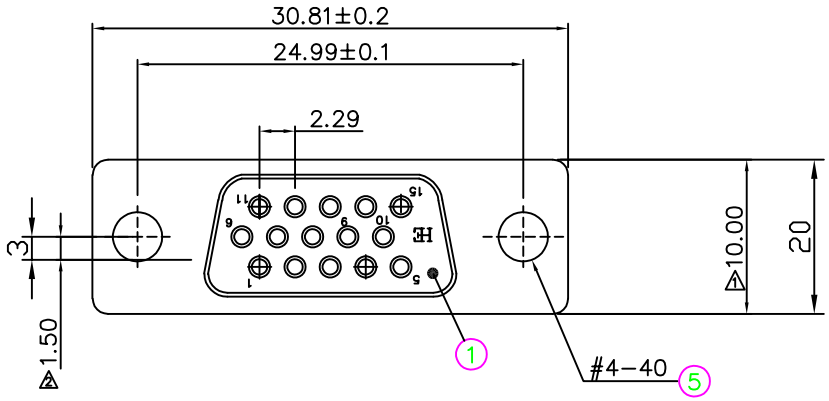

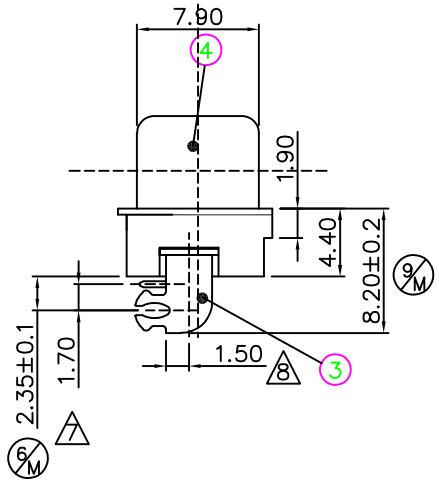

规格:
接触阻抗:30milliohms MAX
耐电压:500V AC
绝缘阻抗:1000 MEGAohms MIN
寿命:5000次，插拔速度300次/小时
插拔力: 插入力MAX:4.5Kgf Max.
拔出力MIN:0.45Kgf Min.
工作温度:-30°C~+85°C
盐雾测试：24H

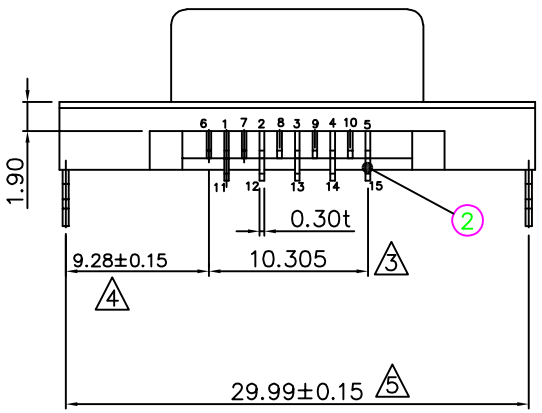

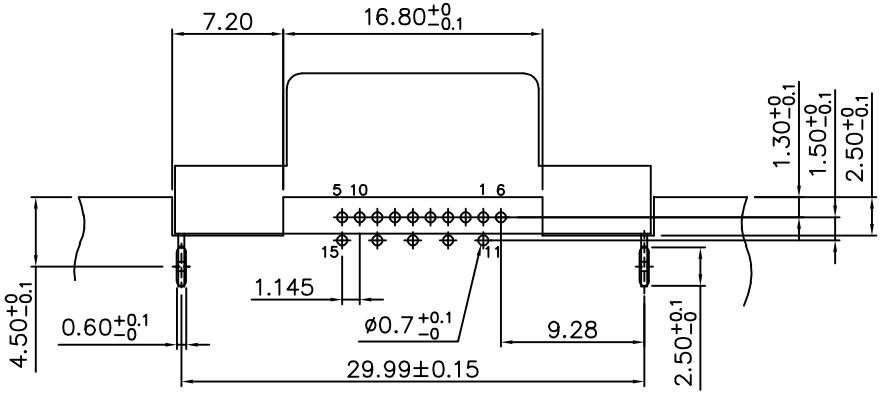

EAST-SLIM15X040-XXX

螺丝:
0: 锁螺丝4.8*9.6
1:无螺丝
2:附螺丝
4:锁螺丝5.8*12.8
5:锁螺丝4.8*11.8
6:锁螺丝5.8*9.8

颜色:
003:蓝色
005:黑色

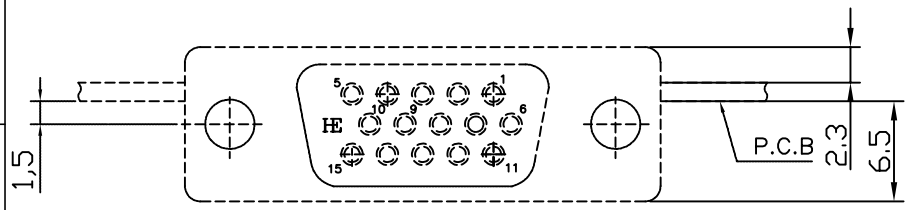

Recommended P.C.B Layout (component side)



SCREW VIEW

NO.	PART NAME	DESCRIPTION	REMARK
5	RIVET	NICKEL PLATED	
4	SHELL	NICKEL PLATED	
3	FORK	TIN PLATED	
2	TERMINAL	COPPER ALLOY	GOLD FLASH
1	HOUSING	HIGH TEMP PLASTIC BLACK	UL94V-0

TOLERANCES UNLESS OTHERWISE SPECIFIED:
X. ---
X.X ± 0.38
X.XX ± 0.25
X.XXX ± 0.10
Angle ±1°

THESE DRAWING AND SPCIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.

COSTOMER COPY

深圳市东方御业科技有限公司
WWW.DFYYCONN.COM TEL:0755-27155560

DRAWN: CHENLEI	2017/09/10	TITAL: SLIM VGA 15P/F反向CL=1.5mm (RoHS)
CHECKED: CHENLEI	2017/09/10	PART NO: EAST-SLIM15X040-XXX
APPROVED: QINKAIXING	2017/09/10	UNIT: mm SCALE: N/A SHEEL: 1:1 REV.