
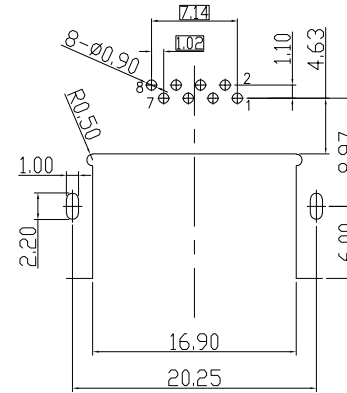
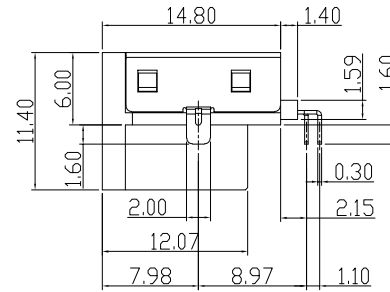
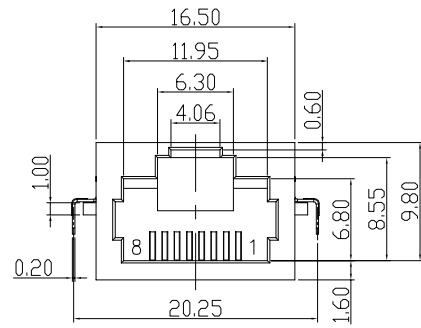



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

SPECIFICATION

- VOLTAGE RATING: 150 VAC RMS.
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 40 mΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
- OPERATING TEMPERATURE: -40°C~+80°C

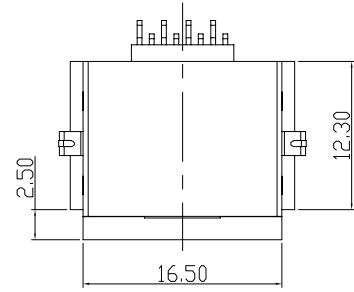


EAST-B011-60001-P

Table2		Table3	
X	Terminal Plating	X	包装方式
0	Au 1u" Plating	C	卷带包装
1	Au 3u" Plating	P	吸塑盒包装
2	Au 6u" Plating		
3	Au 15u" Plating		
4	Au 30u" Plating		
5	Au 50u" Plating		

Table1

X	Color	housing Material
B	Black	LCP UL94V-0
O	Orange(151C)	PA9T UL94V-0
Y	Yellow(130C)	PA9T UL94V-0

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.2mm

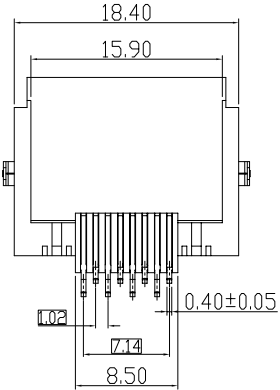

TOLERANCES UNLESS OTHERWISE SPECIFIED:
X. ---
X.X ± 0.38
X.XX ± 0.25
X.XXX ± 0.10
Angle ±1°

COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560			
DRAWN:	CHENLEI	2017/09/10	TITAL: RJ45 H6.00mm		
CHECKED:	CHENLEI	2017/09/10	PART NO: EAST-B011-60001-P		
APPROVED:	QINKAIXING	2017/09/10	DRAWING NO:		(RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.; SHALL NOT BE REPRODUCED.		UNIT: mm	SCALE: N/A	SHEEL: 1:1	REV.