
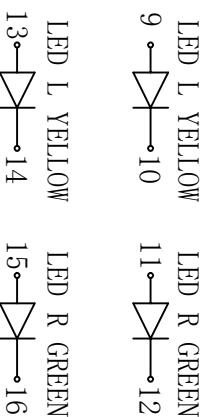
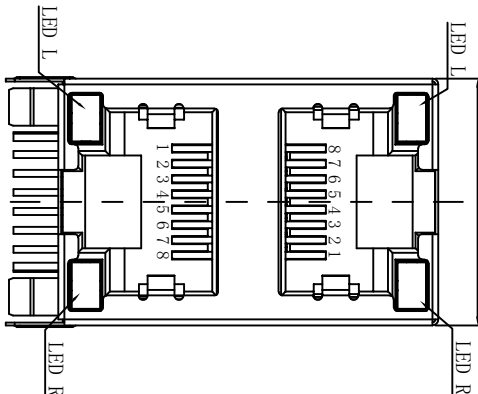
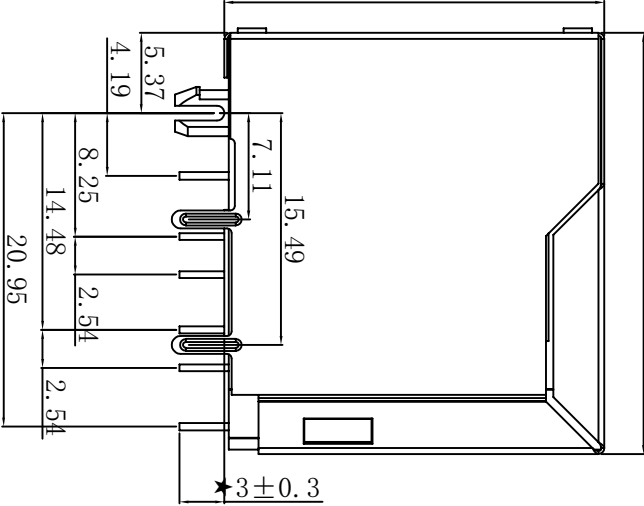


PC Board Layout

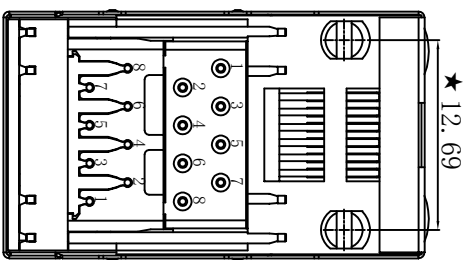

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
 - CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 - DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
- INSERT MATERIAL: UL94V-0.
 - CONTACT MATERIAL: DIAMETER 0.46mm C51000(GSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 - SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
 - MATING/UNMATING FORCE: 2.2KG.F MAX.
 - RETENTION STRENGTH: 3.0KG.F MIN BETWEEN JACK AND PLUG.
 - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
 - OPERATION: -40°C ~ +85°C.
- Remark:
- The mark with★ is the key inspection dimension for QC.

EAST-59C-31882111101

- LED STYLE (LED 颜色类型):
- 1-L LED: GREEN, R LED: YELLOW (左绿右黄)
 - 2-L LED: YELLOW, R LED: GREEN (左黄右绿)
 - 3-L LED: GREEN, R LED: GREEN (双绿)
 - 4-L LED: YELLOW, R LED: GREEN (左绿右黄)
 - 5-L LED: YELLOW, R LED: GREEN (左黄右绿)
 - 6-L LED: YELLOW, R LED: GREEN (左黄右绿)
- PLASTIC(塑料):
- 1-PBT;
 - 2-NYLON66 (尼龙66) ;
 - 3-NYLON46 (尼龙46)
- COLOR(颜色):
- 1-BLACK(黑色)
- GOLD PLATING(镀金厚度):
- 1-FU"; 2-1U"; 3-1.5U"; 4-3U";
 - 5-6U"; 6-15U"; 7-30U"; 8-50U"

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN: CHENLEI		CHECKED: CHENLEI		APPROVED: QINXIAO	
X	± 0.38	2017/09/10		2017/09/10		2017/09/10	
X.X	± 0.25	PART NO: EAST-59C-31882111101		SCALE: N/A		SHEET: 1:1	
X.XXX	± 0.10	5921S LED 2X1 8P8C-D		DRAFTING NO:		REV:	
Angle	±1°	TTL: WWW.DFYYCONN.COM TEL: 0755-27155560		DATE:		APPROVED:	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuve ELECTRONIC CO.,LTD. SHALL NOT BE REPRODUCED.							
COSTOMER COPY							
深州市东方御业科技有限公司							