


REV.	BCN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

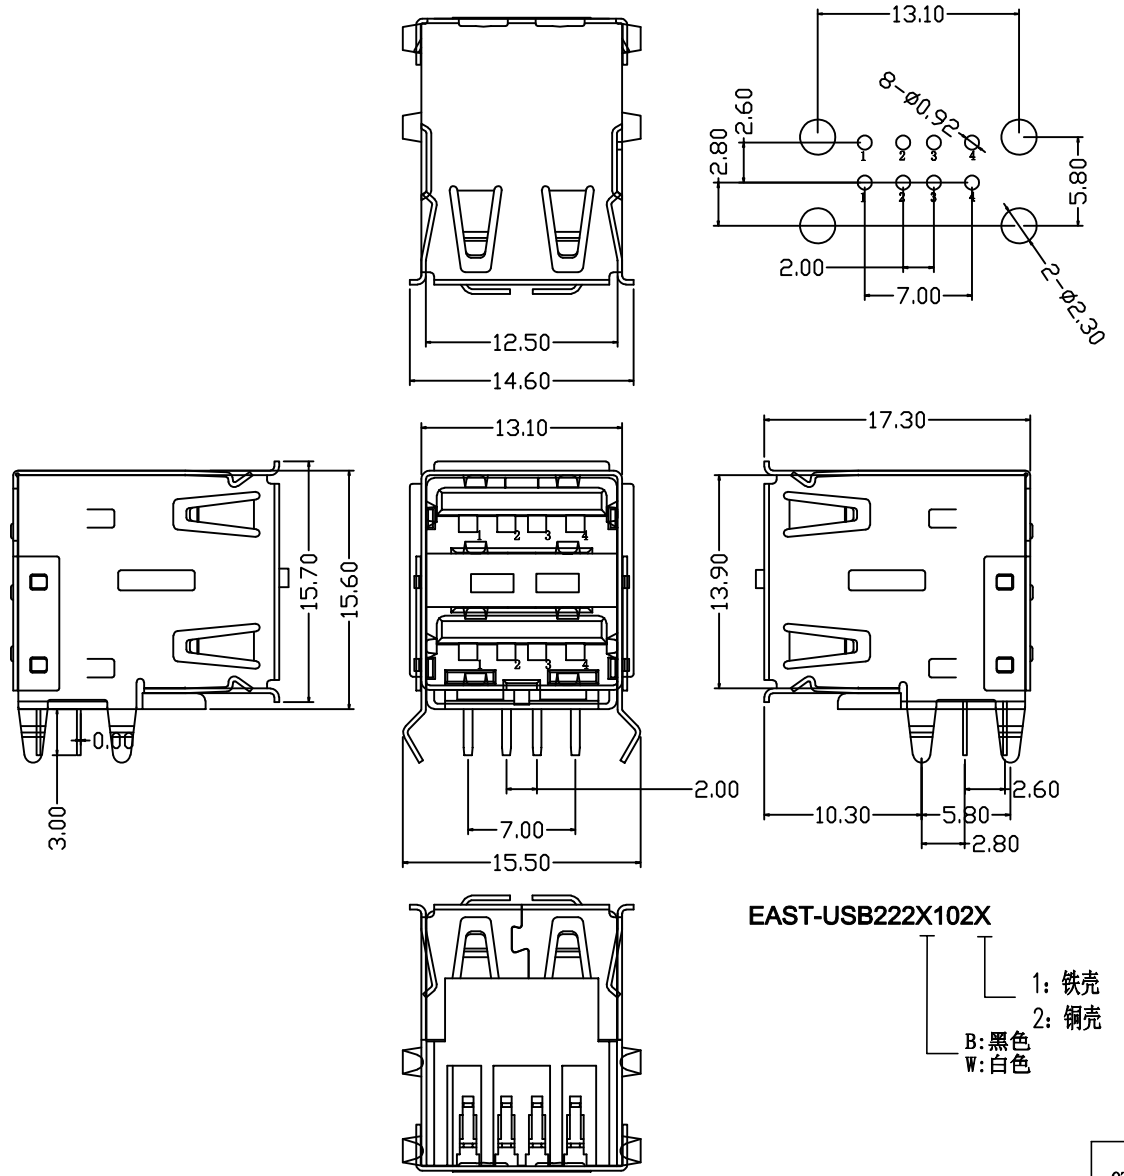

EAST-USB222X102X

- 1: 铁壳
- 2: 铜壳
- B: 黑色
- W: 白色

特性:Specifications

电气:Electrical:

1. 接触阻抗:Contact Resistance
30 milliohms MAX
2. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
3. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

机构:Mechanical:

1. 结合为:Mating Force:
4.0KG NAX 最大4kg
2. 拔出力:Unmating Force:
0.5 KG NIN 最少0.5kg

材料:Material:

1. 塑胶:Housing:Hing Temperature
Thermaplastio
2. 端子:Contact:Copper Alloy 铜合金
3. 外壳:Shell: Copper Alloy铁/铜合金



电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talis
接触点镀金. 脚镀锡
2. 外壳:Shell:


Nickel Plating 镀镍

<p>TOLERANCES UNLESS OTHERWISE SPECIFIED:</p> <p>X. —</p> <p>X. X ± 0.38</p> <p>X. XX ± 0.25</p> <p>X. XXX ± 0.10</p> <p>Angle ±1°</p> <p>THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.</p>	<p>COSTOMER COPY</p> <p>深圳市东方御业科技有限公司</p> <p>WWW.DFYCYCONN.COM TEL:0755-27155560</p>	
	<p>DRAWN:</p> <p>CHENLEI</p>	<p>TITAL:</p> <p>2017/09/10</p> <p>USB 双层半包90度有边弯脚</p>
	<p>CHECKED:</p> <p>CHENLEI</p>	<p>PART NO:</p> <p>2017/09/10</p> <p>EAST-USB222X102X</p>
	<p>APPROVED:</p> <p>QINKAIXING</p>	<p>UNIT:</p> <p>mm</p> <p>SCALE:</p> <p>N/A</p> <p>SHEEL:</p> <p>1:1</p> <p>REV.</p>

REV.	BCN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

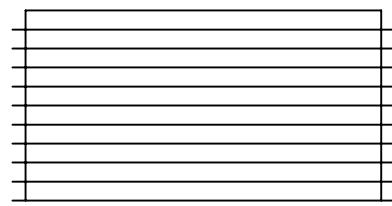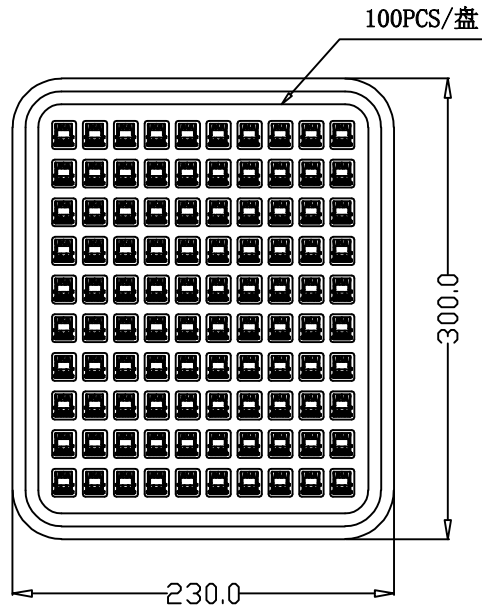

10盘/扎

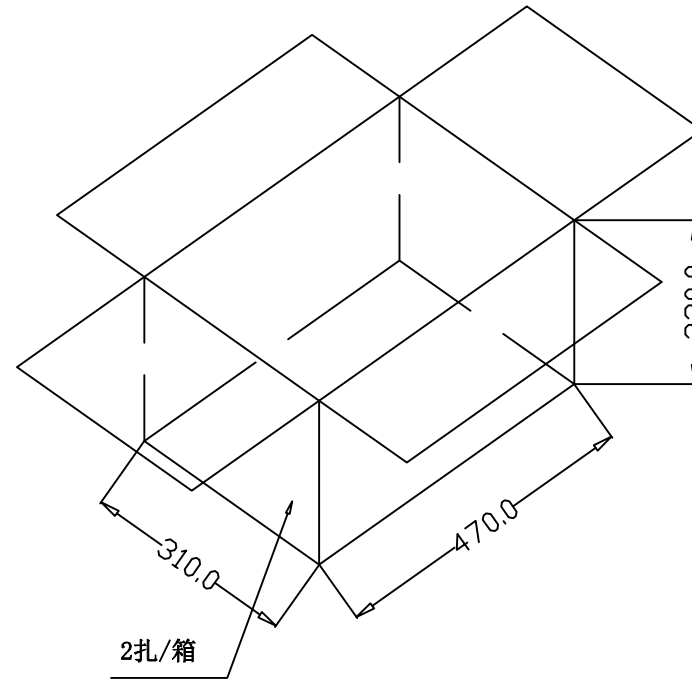

2扎/箱

- 1, 包装盒为PVC透明吸塑盒
- 2, 每盒包装数量为100PCS
- 3, 每箱包装数量为20/盘, 2000/PCS
- 4, 纸箱规格为470*310* 220MM

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. — X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ± 1°	COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONDNN.COM TEL:0755-27155560		
	DRAWN:	CHENLEI	2017/09/10	TITAL:	
	CHECKED:	CHENLEI	2017/09/10	双层USB 2.0包装规范 (RoHS)	
	APPROVED:	QINKAIXING	2017/09/10	PART NO:	
THESE DRAWING AND SPICIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.			UNIT: mm		SCALE: N/A
			SHEET: 1:1	REV.	